


FEATURES & BENEFITS

- **Unique Hybrid design** that resists contraction and expansion, makes it more stable in all environments.
- Premium 5mm thick "Loose Lay" structure for easier installation and maintenance.
- **3D Surface Texture** and high definition print to enhance the real wood look and feel.
- Subtle **beveled edges** for an aesthetic timber plank impression.
- **Superior** resistance to heavy furniture point loads.
- Made from **100% Original materials** to ensure controlled quality and stability.
- Enhanced 0.5mm wear layer for **higher durability**.
- Natural **Nano-Silver** surface technology helps protect your family against harmful germs.
- **Bio-based** materials (phthalate free, low-VOC) which is healthier and safer for you and the environment.
- **Acoustically rated** to reduce disturbance via noise transfer.
- Elegant **extra-long premium planks** transform your home by providing the illusion of a larger, more open space.
- **25 year residential warranty / 15 year commercial warranty.**

LOOSE LAY

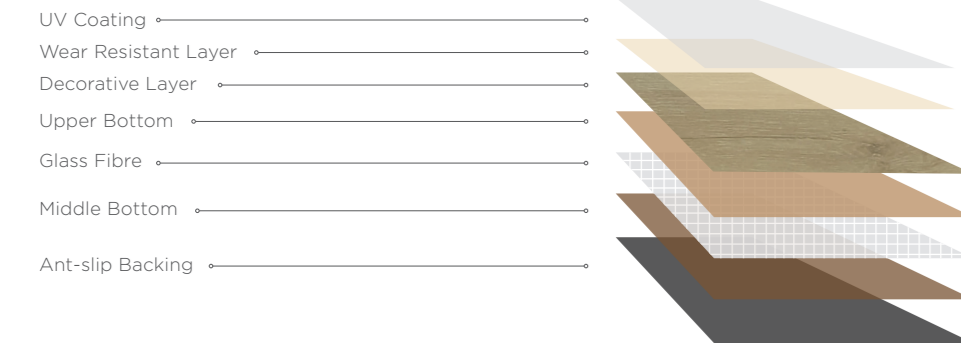

■ **NATURAL NANO-SILVER** surface technology -

Helps protect your family against harmful germs.

■ **BIO-BASED MATERIALS** (no harmful chemicals).

Healthier & safer for you and the environment.



ADMIREDFLOORING *For a lasting impression*

YOUR LOCAL STORE DETAILS

CHARACTERISTICS	TEST METHOD	RESULT
Slip Resistance	AS 4586 : 2013 Appendix A Wet Pendulum Test by Slip test Australia Pty Ltd	P3 R10
Acoustic Performance	ISO 140VII " Field measurement of impact sound insulation of floors, by Palmer Acoustics (Australia) Pty Ltd	L'nT,w Reduction of 6
Dimension Stability	EN 434-1994 by AWTA Product Testing (Australia)	Dimensional Change: 0% to Length, 0% to Width Curling: 0mm
Surface Treatment		UV and Nano-Silver
Wear Layer & Performance Classification	EN 685	0.5mm, Class 32
Peeling strength of layers	EN 431	Pass
Shear forces of layers	EN 432	Good
Flexibility - 10mm mandrel	EN 435	No Damage
Wear resistance	EN 660ASTM F510	< 2.0mm ³
Toxicity	EN 71 part 3	Complies
Colour fastness to light	ENISO 105-B02	> 6
Bearing a caster chair	EN 425	Suitable
Resistance to chemicals	EN 423 ASTM F925	Class 0
Fire resistance	AS/ISO 9239.1-2003	CHF 7.8kW/m ² Smoke 110%
PVC Block material performance testing & grade flammability testing	GB/T4085 GB 8624 B1	Pass
Anti-flaming	CNS 8907	Pass



For a lasting impression

LUXURY VINYL PLANK FLOORING


www.admiredflooring.com.au



CLASSIC
BOARDS
1.2 m



SAND DUNE

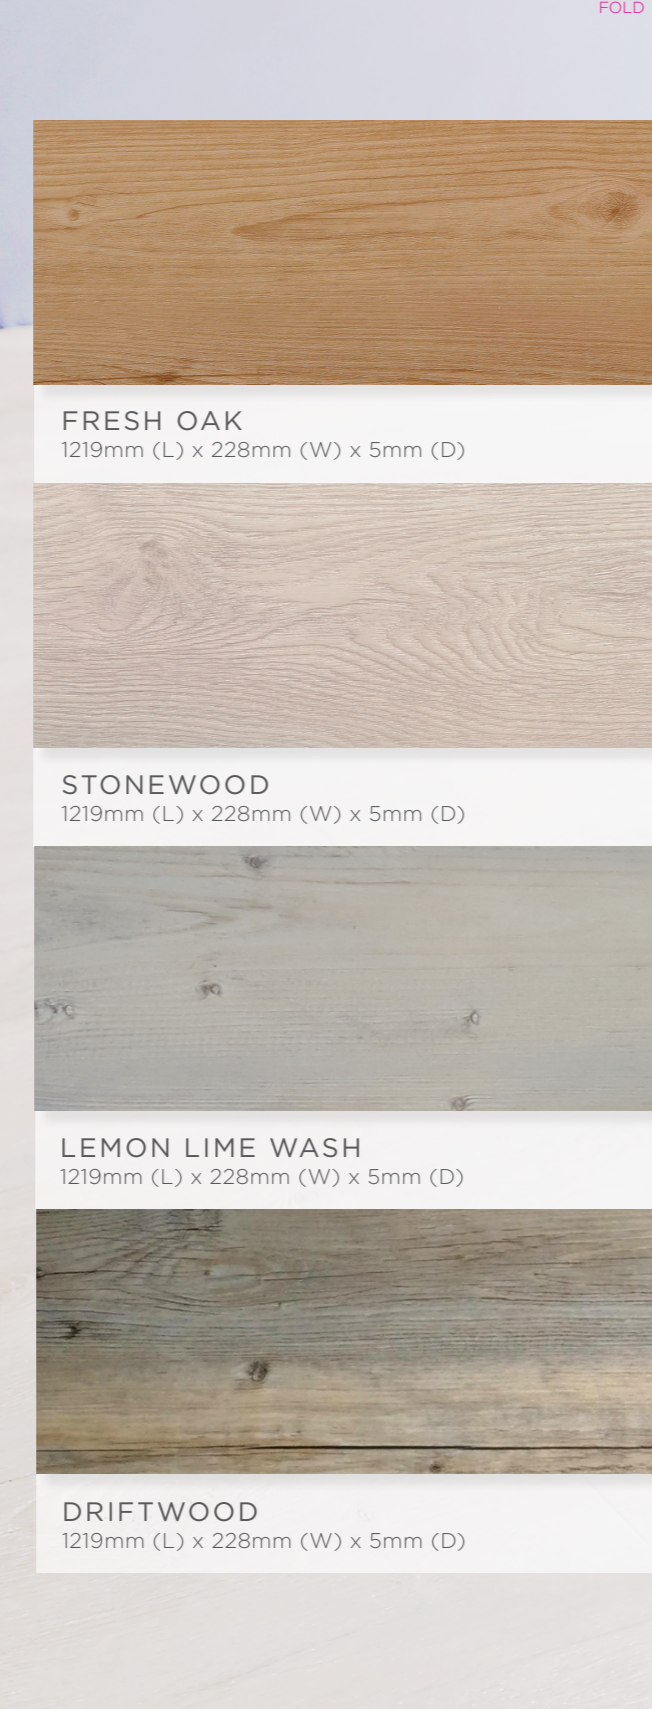

FRESH OAK
1219mm (L) x 228mm (W) x 5mm (D)

STONEWOOD
1219mm (L) x 228mm (W) x 5mm (D)

LEMON LIME WASH
1219mm (L) x 228mm (W) x 5mm (D)

DRIFTWOOD
1219mm (L) x 228mm (W) x 5mm (D)




For a lasting impression

LONG
BOARDS
1.8 m



VINTAGE

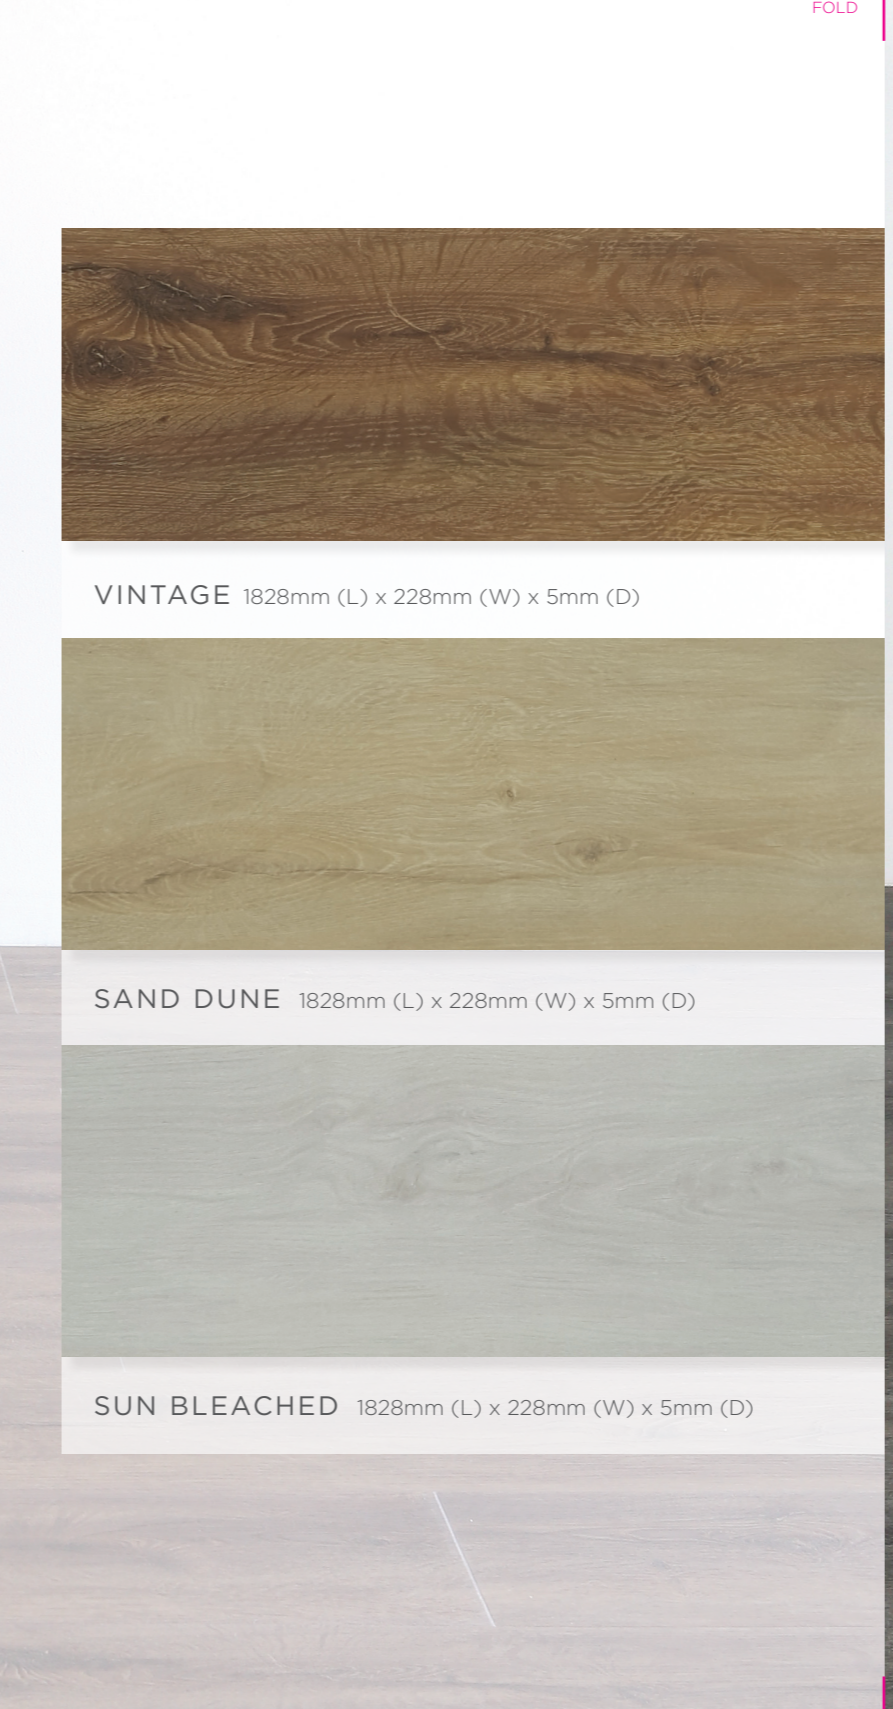

VINTAGE 1828mm (L) x 228mm (W) x 5mm (D)

SAND DUNE 1828mm (L) x 228mm (W) x 5mm (D)


SUN BLEACHED 1828mm (L) x 228mm (W) x 5mm (D)



LONG
BOARDS
1.8 m



CHIC

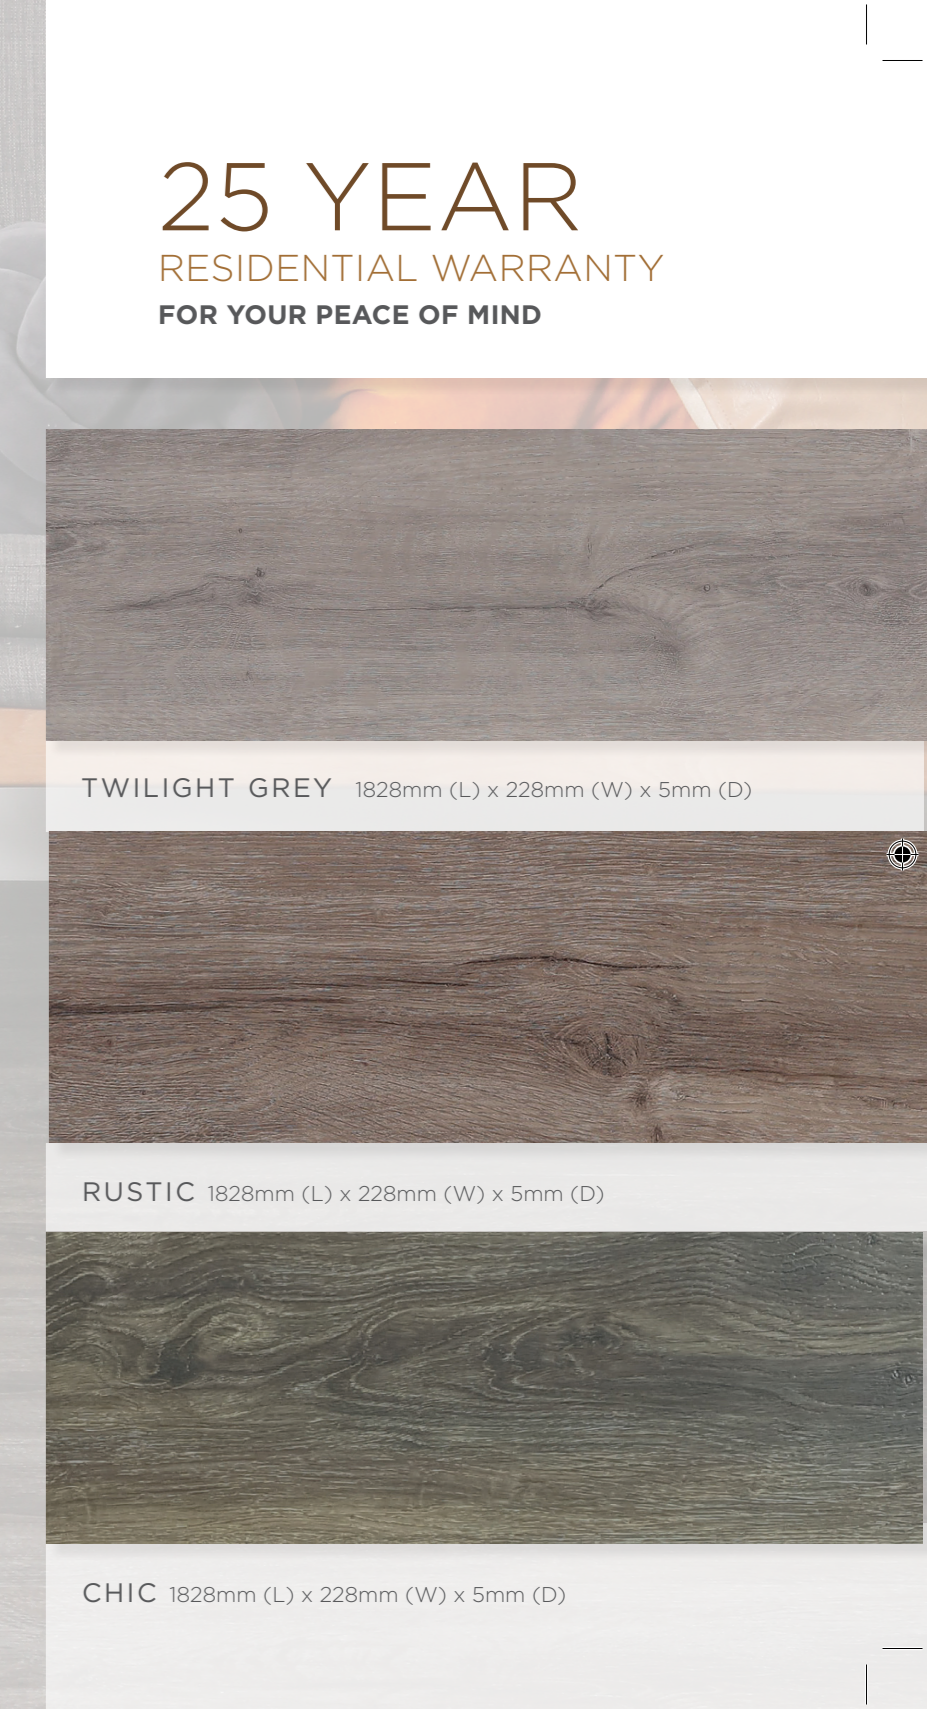

TWILIGHT GREY 1828mm (L) x 228mm (W) x 5mm (D)

RUSTIC 1828mm (L) x 228mm (W) x 5mm (D)

CHIC 1828mm (L) x 228mm (W) x 5mm (D)

25 YEAR
RESIDENTIAL WARRANTY
FOR YOUR PEACE OF MIND